


# Careline™ Leg Bags

## Sterile

### Intended use:

Urine drainage bag with scale for collection and monitoring of urine output. The device is not intended to have a measurement function. The scale is approximate and for indication purposes only. The product is intended for single use only.

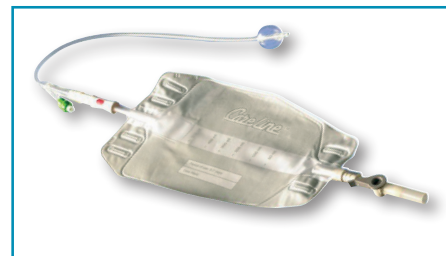

### Product range:

| REF*         | Volume ml | Tube length cm | KombiKon™ needle-free sample port | Connector | Cut to fit | Bottom outlet | Textile on backside | Hospital pack** | Community pack*** |
|--------------|-----------|----------------|-----------------------------------|-----------|------------|---------------|---------------------|-----------------|-------------------|
| 12 618 1S-xx | 500       | 8.5            | Yes                               | -         | -          | Cross valve   | -                   | Yes             | -                 |
| 12 629 1S-xx | 500       | 8.5            | Yes                               | -         | -          | Lever tap     | -                   | Yes             | -                 |
| 12 623 1S-xx | 500       | 29.0           | Yes                               | -         | -          | Cross valve   | -                   | Yes             | -                 |
| 12 632 1S-xx | 500       | 29.0           | Yes                               | -         | -          | Lever tap     | -                   | Yes             | -                 |
| 08 613 1S-xx | 350       | 8.5            | Yes                               | -         | -          | Cross valve   | Yes                 | -               | Yes               |
| 08 620 1S-xx | 350       | 29.0           | Yes                               | -         | -          | Cross valve   | Yes                 | -               | Yes               |
| 12 613 1S-xx | 500       | 8.5            | Yes                               | -         | -          | Cross valve   | Yes                 | -               | Yes               |
| 12 612 1S-xx | 500       | 8.5            | Yes                               | -         | -          | Lever tap     | Yes                 | -               | Yes               |
| 12 620 1S-xx | 500       | 29.0           | Yes                               | -         | -          | Cross valve   | Yes                 | -               | Yes               |
| 12 621 1S-xx | 500       | 29.0           | Yes                               | -         | -          | Lever tap     | Yes                 | -               | Yes               |
| 24 111 1S-xx | 750       | 10.0           | -                                 | Yes       | -          | Cross valve   | Yes                 | -               | Yes               |
| 24 151 1S-xx | 750       | 50.0           | -                                 | Yes       | Yes        | Cross valve   | Yes                 | -               | Yes               |
| 24 610 1S-xx | 750       | 8.5            | Yes                               | -         | -          | Cross valve   | Yes                 | -               | Yes               |
| 24 612 1S-xx | 750       | 9.0            | Yes                               | -         | -          | Lever tap     | Yes                 | -               | Yes               |
| 24 620 1S-xx | 750       | 29.0           | Yes                               | -         | -          | Cross valve   | Yes                 | -               | Yes               |
| 24 621 1S-xx | 750       | 29.0           | Yes                               | -         | -          | Lever tap     | Yes                 | -               | Yes               |

\* Here noted as xx, reference codes contain two additional digits (10-50) representing a language code.

Products may not be available in all countries. Please contact your regional ConvaTec sales representative for further information.

\*\* Includes 2 leg straps per leg bag, \*\*\* Includes 2 leg straps per shelf box (10 leg bags).

### Material specifications:

|                                 |   |
|---------------------------------|---|
| <b>Contains latex?</b>          | No  |
| <b>Contains DEHP?</b>           | No  |
| <b>Contains cotton?</b>         | No  |
| <b>Tube inlet/outlet, Foil.</b> | Polyvinyl chloride  |
| <b>Sample port/KombiKon™</b>    | Polyvinyl chloride, Polypropylene, High density polyethylene, Polyethylene, Poly(styrene-butadiene-styrene) |
| <b>Regular connector.</b>       | Polyvinyl chloride  |
| <b>Cross valve.</b>             | Polypropylene, High density polyethylene  |
| <b>Cap</b>                      | Low density polyethylene, High density polyethylene   |
| <b>Tube on bottom outlet.</b>   | Silicone  |
| <b>Lever tap</b>                | Polyvinyl chloride, Acrylonitrile-butadiene-styrene, Silicone   |
| <b>Film</b>                     | Polyvinyl chloride  |
| <b>Strap</b>                    | Polyamide   |

### Certifications:

|  |               |
|--|---------------|
| <b>CE-marking?</b>                               | Yes (CE 0086) |
| <b>Product classification</b>                    | Class I (EU)  |
| <b>Quality system certified to</b>               | ISO 13485     |
| <b>Global Medical Device Nomenclature (GMDN)</b> | .58923        |

### Sterilization:

|                      |  |
|----------------------|--|
| <b>Sterile?</b>      | Yes  |
| <b>Sterilized by</b> | Ethylene oxide   |
| <b>Shelf life</b>    | 4 years<br>except 24 111 1S-xx and 24 151 1S-xx: 5 years |

## Packaging specifications:

| REF          | Shelf box |                        | Shipping carton |                        |              |                       | MOQ, pcs |
|--------------|-----------|------------------------|-----------------|------------------------|--------------|-----------------------|----------|
|              | Qty, pcs  | Dimensions, mm (LxWxD) | Qty, pcs        | Dimensions, mm (LxWxD) | Gross Wt. kg | Volume m <sup>3</sup> |          |
| 08 613 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 6.6          | 0.067                 | 2,800    |
| 08 620 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 6.6          | 0.067                 | 2,800    |
| 12 612 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 6.0          | 0.067                 | 2,000    |
| 12 613 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 6.3          | 0.067                 | 2,000    |
| 12 618 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 5.6          | 0.067                 | 2,000    |
| 12 620 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 7.7          | 0.067                 | 2,000    |
| 12 621 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 7.9          | 0.067                 | 2,000    |
| 12 623 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 6.4          | 0.067                 | 2,000    |
| 12 629 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 6.0          | 0.067                 | 2,000    |
| 12 632 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 6.6          | 0.067                 | 2,000    |
| 24 111 1S-xx | 10        | 280 x 188 x 117        | 40              | 388 x 286 x 242        | 2.2          | 0.027                 | 2,240    |
| 24 151 1S-xx | 10        | 280 x 188 x 117        | 40              | 388 x 286 x 242        | 2.2          | 0.027                 | 2,240    |
| 24 610 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 7.1          | 0.067                 | 2,000    |
| 24 612 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 7.1          | 0.067                 | 2,000    |
| 24 620 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 6.9          | 0.067                 | 2,000    |
| 24 621 1S-xx | 10        | 210 x 190 x 150        | 100             | 792 x 218 x 392        | 7.1          | 0.067                 | 2,000    |

## Storage and handling:

